

PRESSURE GAUGES TYPE MG6F / MG8F

LEITENBERGER

Mess- und Regeltechnik GmbH



Bahnhofstraße 32/33

D-72138 Kirchentellinsfurt

Fon: +49 (0)7121/908-0

Fax: +49 (0)7121/908-200

E-Mail: mrt-info@leitenberger.de

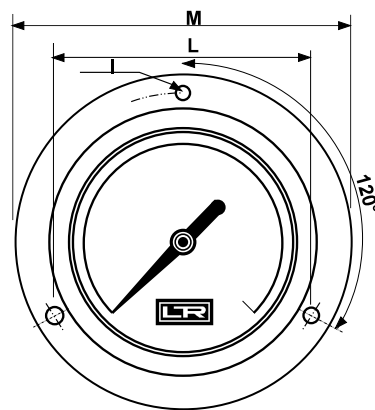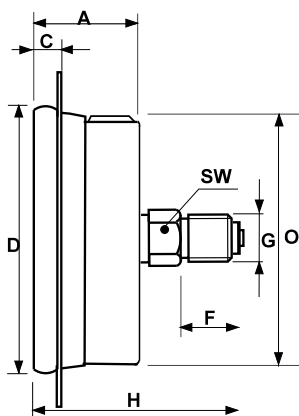

Type	NG	A	C	D	F	G	H	I	L	M	O	SW
MG6F	2.48	1.14	0.29	2.69	0.51	1/4 SAE	2.36	0.18	2.95	3.33	2.52	0.55
MG8F	3.15	1.14	0.3	3.39	0.39	1/8 NPT	2.36	0.2	3.78	4.33	3.23	0.55

Case:	AISI 304 stainless steel
Window:	plexiglass
Ring:	AISI 304 stainless steel, polished
Socket:	1/4 SAE or 1/8 NPT, back, OT 58 brass
Elastic element:	phosphor bronze
Movement:	gearing, OT 59 brass
Dial:	white
Pointer:	black oxidized aluminium
Range:	High: -1/+38 bar / Low: -1/+18 bar High: 14,50/500 psi / Low: 14,50/260 psi
Accuracy:	cl. 1,6
Ambient-T:	+15 / +65°C / +59/149 °F
Process fluid-T:	max. +65°C / +149 °F
Process pressure:	max. 75% of full scale value
Over pressure:	25% of full scale value
Blow-out plug:	EPDM
Protection:	IP65 according IEC29
Options on request:	- scales for all marketable refrigerants - dry version without glycerine - other connectors

Unit: Inch